



Agripak Linkage

500/700/1000 LITRE

Agripak Linkage Sprayer Specification

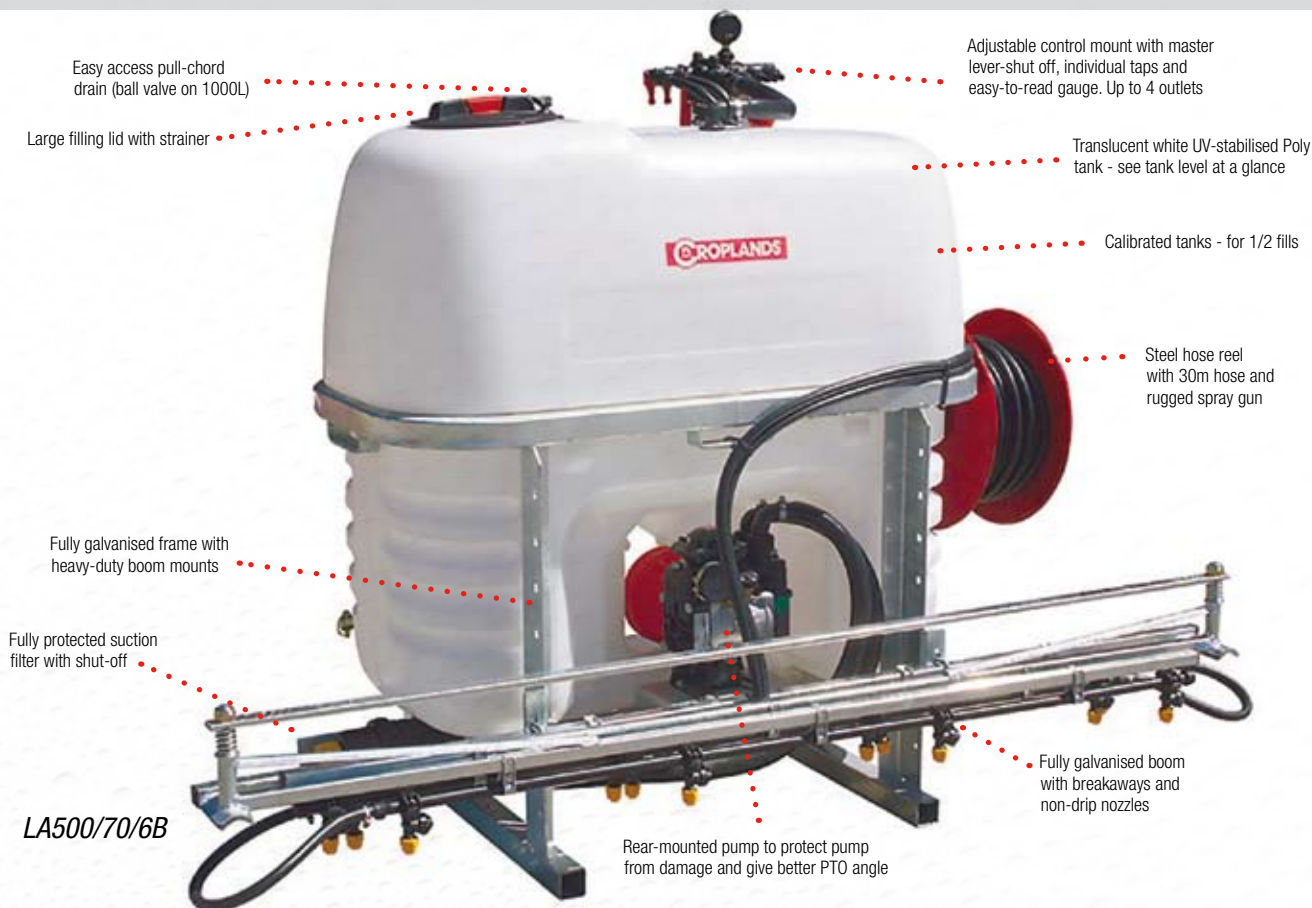

TANK	White polyethylene UV stabilised tanks, 500, 700 & 1000 litre with calibrated markings, threaded lid and basket strainer. Designed to bring weight as far forward as possible for maximum safety. 1000 litre has an integral 15 litre hand-wash tank fitted.
FRAME	Heavy duty hot-dipped galvanized frames for maximum strength and durability
HITCH POINTS	Category I & II on 500/700 litre, Category II & III on 1000 litre.
BOOMS	Galvanised finish, quickjet nozzles: 4 metre (MB04) - single tap on/off: 6 metre (MB06) - left/right, 2 tap control; 8/10/12 metre (MF08/10/12 & GEX6/8/10) - left/centre/right, 3 tap control.
PUMPS	PTO driven (shaft supplied) A & R positive displacement, oil bath diaphragm pumps with chemical resistant diaphragms. AR70 - 72 litres/min, 20 bar (284 psi) maximum AR115 - 115 litres/min, 20 bar (284 psi) maximum [optional] AR30 - 30 litres/min, 40 bar (580psi) maximum fitted to LA500/30
FILTRATION	3 point filtration: > Basket strainer 18 mesh > Large suction strainer with auto shut-off 80 mesh > Nozzle strainers 100 mesh
CONTROLLER	UCM manual 4 way pressure relief valve with pressure adjustment and master On/Off. Optional Idrominus compensating regulator available. Optional electric controllers available. ARGI40 fitted on LA500/30.
OPTIONAL EQUIPMENT	See page 5.

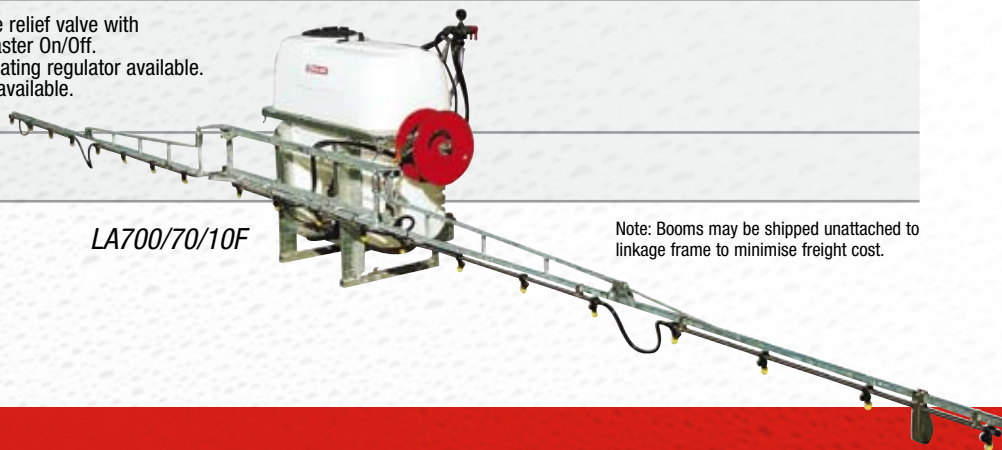

Note: Booms may be shipped unattached to linkage frame to minimise freight cost.